

AC PUMPS PANTHER 56



EN. Electric diesel transfer pump with rotary vanes and self-priming capabilities. Fitted with bypass valve and elevated reliability seal, keeping it functional even at low working temperatures. Compact and easy to install, the **Panther 56** is ideal for industrial applications such as dispensers and fixed fuel transferring systems. Suitable for continuous use with thermal motor overload protection.

ES. Bombas eléctricas para el trasiego de combustible. Desplazamiento, bomba eléctrica de paletas rotativas con auto cebante. Equipada con válvula de bypass y sello de fiabilidad aun en bajas temperaturas. Compactas y fáciles de instalar, son ideales para dispensadores fijos u otras aplicaciones industriales. Estructura robusta de hierro de fundido, bomba de paletas con rotor de acero y paletas de resina acetil, motor de inducción con estructura en aluminio. Adecuadas para el funcionamiento continuo con protección térmica para sobrecarga del motor.

PT. Electrobombas para transferência de gasóleo. Rotatórias, volumétricas autoescorvantes com palhetas. Equipadas com válvula by-pass. Blindagem de alta confiança mesmo se utilizadas com temperaturas baixas. Compactas e fáceis de instalar, são ideais para distribuidores e sistemas fixos de transferência de carburante e outras aplicações industriais. Estrutura robusta de ferro gusa, bomba de palhetas com rotor de aço sinterizado e palhetas de resina de acetil, motor de indução com cárter de alumínio. Podem ser utilizadas em contínuo com protecção térmica contra sobrecarga do motor.


PERFORMANCE

- Flow rate up to 15 GPM
- Continuous AC operation.
- Noise level below 75 dB
- Incorporated filter

- Caudal hasta 72 l/min
- Funcionamiento CA continuo
- Nivel de ruido inferior a 75 dB
- Filtro incluido


- Caudal até 72 l/min
- Funcionamento contínuo AC
- Ruído inferior a 75 dB
- Filtro incorporado

DIMENSIONS

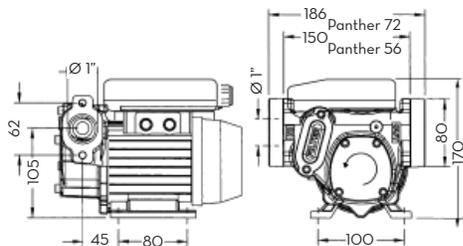

PRODUCTS' RANGE WEIGHT AND PACKAGING



Part #	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
PANTHER 56					
FO0730410	10	22	345X175X255	13x7x11	1

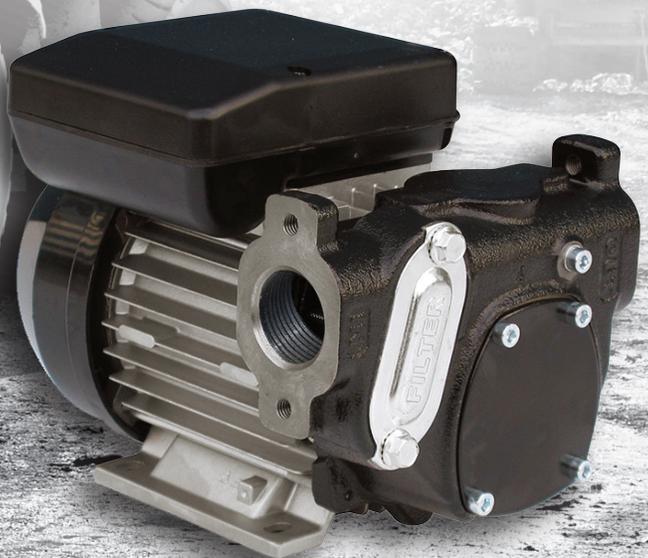

Flow rate
up to
15
GPM

2 YEAR
WARRANTY

PIUSI
USA INC®

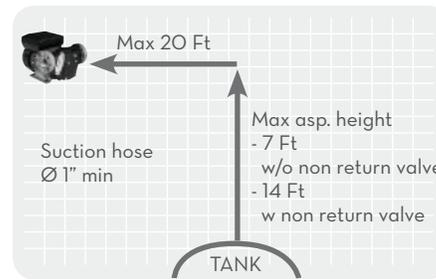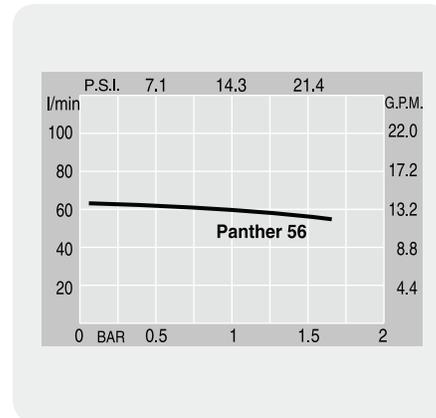

FEATURES



ON REQUEST



PRODUCTS' RANGE TECHNICAL DATA

Part #	Description	Fluids type	Flow rate		Voltage				rpm	Inlet Outlet NPT	Flange connection	Bypass valve	Inlet filter
			l/min	gpm	Singlephase motor V./Hz	Threephase motor V./Hz	Power Watt	Amp. max.					
FO0730410	Panther 56	D	56	15	120/60	-	800	7.5	3400	1"	-	YES	YES